HELI合力

CBD20/25-491 (UGD)

电动托盘搬运车
Electric Pallet Truck



产品性能特点:


- 驱动单元专利设计浮动机构。
- 高速快捷，行驶速度11公里/小时。
- 电子助力转向，轻便、静音。
- 交流驱动电机，无碳刷、免维护。
- 电起升，快速、高效，标配起升限位装置。
- 交流控制器，无及调速，动力强劲，多重自动保护。
- 弯道自动减速功能，更安全。
- 半包围驾驶舱，更关心您的安全。
- 独特的节能升降机构-导轨升降机构，电池不起升，更节能。
- 选配手柄高度可调。
- 锂电款采用磷酸铁锂电池，充电快、效率高。
- 蓄电池侧拉设计，更换便捷、高效。

Characteristics:

- Drive unit floating bodies with patent design.
- High running speed,driving speed is 11Km/h.
- Electronic power steering,light and low noise.
- AC driving motor without carbon brush and free maintenance.
- Electric lifting,rapid,efficient,electricity limit switch is STD.
- AC controller,stepless,strong power,multiple automatic protection.
- Curve automatic deceleration function,safer.
- Surrounded by half a cockpit,care for your safety.
- Unique energy-saving lifting mechanism - guide rail lifting mechanism, battery not lifting, more energy-saving.
- Optional handle with adjustable height.
- The LFP model lithium batteries are fast charging and efficient.
- Side-way battery,easy to replace.

CBD20/25-491 (UGD)

制造商和技术参数 Manufacturer's Data and Design Characteristics					
	特性 Features				
1.01	型号	Model	kg	CBD20/25-491 (UGD)	
1.02	操作类型	Operating type	mm	乘驾式 Ride-on	
1.03	额定载重	Load capacity	mm	2000/2500	
1.04	载荷中心距	Load center		600	
1.05	轴距	Wheel base		1530	
	车轮 Wheels				
2.01	轮子类型	Wheels type		聚氨酯 PU	
2.02	驱动轮/平衡轮/承重轮数量	Wheel quantityDriving wheel/Balance wheel/Bearing wheel		1/2/4	
2.03	驱动轮尺寸	Driving wheel size	mm	Φ248X75	
2.04	承载轮尺寸	Bearing wheel size	mm	Φ84×80	
2.05	平衡轮尺寸	Balance wheel size	mm	Φ115×55	
	尺寸 Dimension				
3.01	货叉最低离地高度	Min.fork lowered height	mm	85	
3.02	货叉最大起升高度	Max.fork lifting height	mm	205	
3.03	最大起升行程	Max.lifting height	mm	120	
3.04	货叉外侧间距	Outside width between forks	mm	550/685	
3.05	货叉内侧间距	Inside width between forks	mm	210/345	
3.06	货叉长度	Fork length	mm	1150/1200	
3.07	货叉宽度	Forkwidth	mm	170	
3.08	货叉厚度	Fork thickness	mm	55	
3.09	整车全长	Overall length	mm	2385/2435	
3.10	车体宽度	Overall width	mm	812	
3.11	整车高度 (含手柄)	Overall height(With handle)	mm	1238	
3.12	最小转弯半径	Min.Turning radius	mm	2210/2260	
3.13	最小直角堆垛通道宽度(托盘800×2400, 2400沿货叉放置)	Min.Aisle width for pallets 800×2400	mm	2850/2900	
3.14	最小直角堆垛通道宽度(托盘1000×2400, 2400沿货叉放置)	Min.Aisle width for pallets 1000×2400	mm	2943/2993	
	性能 Performance				
4.01	最大行驶速度，满载/空载	Travelling speed,laden/unladen	km/h	10/11	
4.02	最大起升速度，满载/空载	Lifting speed,laden/unladen	mm/s	30/35	
4.03	最大下降速度，满载/空载	Lowering speed,laden/unladen	mm/s	40/35	
4.04	爬坡度，满载/空载	Gradeability,laden/unladen	%	10/15	
4.05	制动类型	Service brake type		电磁制动Electromagnetic	
	电气配置 Electrical configuration				
5.01	驱动电机额定功率S2 60分钟	Traction motor rating at S2 60 min	kW	AC 3	
5.02	起升电机额定功率S3 15%	Lift motor rating at S3 15%	kW	DC 2.2	
5.03	电池	Battery		铅酸电池Lead-acid battery	锂电Lithium battery (Optional)
5.04	蓄电池电压/标称容量	Battery voltage / capacity	V/Ah	24/270	24/200
5.05	充电器规格	Charger specification	V/A	24/50	24/100
	重量 Weight				
6.01	蓄电池重量 (±5%)	Battery weight (±5%)	kg	247	105
6.02	自重 (包含蓄电池)	Service weight with battery	kg	865	723
	其他 Others				
7.01	噪音等级	Sound level	dB(A)	≤69	
7.02	转向类型	Steering type		电转向 Electronic	
7.03	驱动控类型	Drive control type		交流控制 AC	
7.04	控制器	Controller		前拓 QEXPEND	

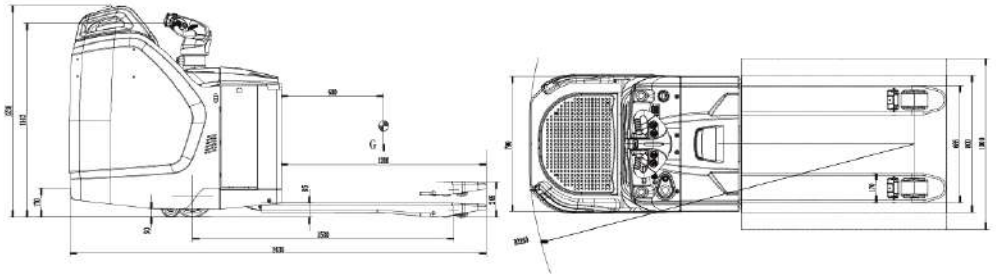

HELI

Heli España - Global Carretillas
C/ Palautordera 14-16. P.I. Palou Nord
08401 Granollers - Barcelona - España
Delegación CENTRO:
Avda. Premios Nobel, 28. Nave 16
28850 - Torrejón de Ardoz - Madrid
www.carretillasheli.com